


VARBERG

Strong & durable LED recessed luminaire

PRODUCT CODE	LUMENS	LENGTH (L)	LOAD
VAR/2/2250/4000	2250	687 (634)	18W
VAR/2/2450/4000	2450	687 (634)	20.5W
VAR/2/4500/4000	4500	687 (634)	35W
VAR/2/4900/4000	4900	687 (634)	39W

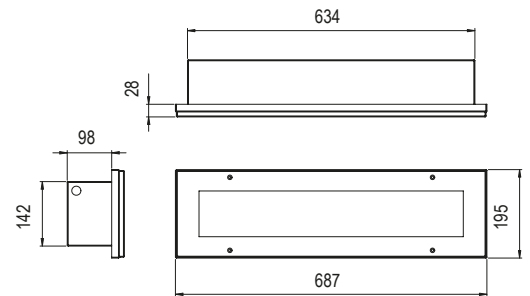

Recessed linear LED fitting, unique upstand recessing flange, suitable for new installations or retrofitting into existing cavities when Bergo, Bergen or Victor have been removed.
body in Zinc coated steel.

3mm clear patterned polycarbonate flat panel diffuser secured by anti-tamper fixings.

2250 & 2450 lm are supplied set to ordered level but version for on-site switchable output is available – add suffix “ADJ”.

4500 & 4900 lm are supplied set to ordered level but version for on-site switchable output is available – add suffix “ADJ”.

CCT:	4000K
Finish:	Painted Textured Black
IP:	65
IK:	18

Other colours and technical modifications available.