


# VARBERG

Strong & durable LED recessed luminaire

PRODUCT CODE	LUMENS	LENGTH (L)	LOAD
VAR/2/2250/4000	2250	687 (634)	18W
VAR/2/2450/4000	2450	687 (634)	20.5W
VAR/2/4500/4000	4500	687 (634)	35W
VAR/2/4900/4000	4900	687 (634)	39W

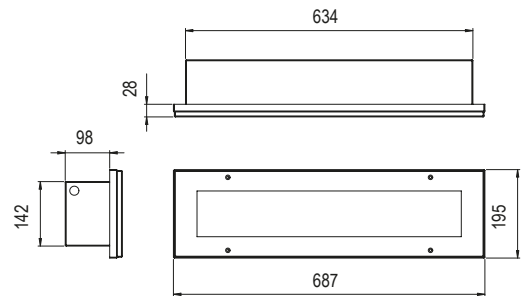

**Recessed linear LED fitting, unique upstand recessing flange, suitable for new installations or retrofitting into existing cavities when Bergo, Bergen or Victor have been removed.**

body in Zinc coated steel.

3mm clear patterned polycarbonate flat panel diffuser secured by anti-tamper fixings.

2250 & 2450 lm are supplied set to ordered level but version for on-site switchable output is available – add suffix “ADJ”.

4500 & 4900 lm are supplied set to ordered level but version for on-site switchable output is available – add suffix “ADJ”.

<b>CCT:</b>	4000K
<b>Finish:</b>	Painted Textured Black
<b>IP:</b>	65
<b>IK:</b>	18

Other colours and technical modifications available.