

ELEMENTS - GRID

AETHER GRID SLIM Ultra slim depth LED Panel

SPECIFICATION

AETHER REFERENCE: GRD

DESCRIPTION AND HOUSING A ultra slim depth 600 x 600 lay-in LED panel. Low Glare UGR <19 for LG7 compliance. Part L and ETL compliant efficacies. Self-extinguishing TP(a) diffuser option available /TPA

DIMENSIONS 596mm x 595mm x 8.5mm

LIGHT SOURCE 26 W -3100 Lumen LED REF: *GRD/26/4000K*
34.5 W - 3900 Lumen LED REF: *GRD/34.5/4000K*

Available in - /3000K & /4000K Please note: Other outputs, options and accessories available.


MOUNTING Lay-in ceiling recessed. Plasterboard mounting kit option available /PMK. Suspension Kit option available /SUS. Surface mount frame option available /SM

CONTROL GEAR Tridonic driver. Various dimming options available. /DIM. Available with 3 hour emergency /EM. Casambi Bluetooth wireless network (inc dim) option available /BTC

FINISH White finish

Data Sheet

Grid LED PANEL

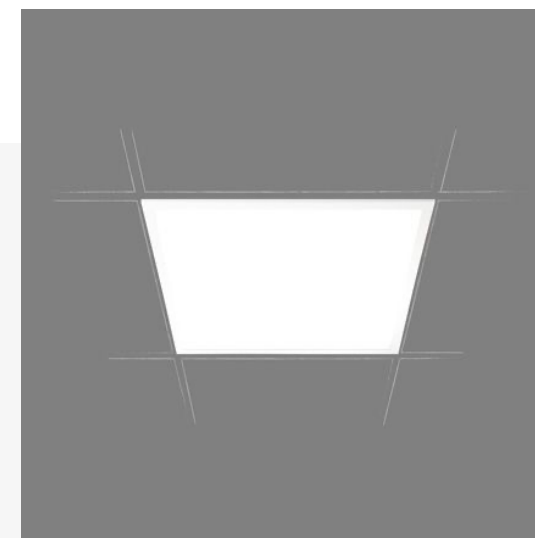

ELEMENTS 
BY AETHER LIGHTING

M: 07827 233720 | **T:** 020 8254 0094 | **E:** rob.cumper@aetherlighting.com
A: 67 SOUTH STREET, EPSOM, SURREY KT18 7PY

www.aetherlighting.com

This document and the information contained herein, may not be copied, used or disclosed in whole or in part, without the written permission of Aether Lighting Ltd. ©2020.